




Installation of countertop washbasins

Countertop washbasins Variant are fitted in to a space which must be completely prepared in advance, i.e. all installations must be finished first. To mount the washbasin supporting middle brackets must be ordered by the manufacturer, edge angle irons or a special supporting frame. To mount the washbasin on the wall, bolts and plastic anchors are used based on the type of the wall material. If the washbasin is to be mounted on a plasterboard wall, the supporting structure in the place where the washbasin will be mounted must be reinforced or appropriate reinforcement of the supporting structure under the plasterboards must be discussed with the manufacturer (wooden infill). The washbasins placed on top of the counters are fitted in silicone (not included in the delivery). Installation drawing shows the connecting dimensions of water and the drain outlets (pillar tap) to the axis of one washbasin.

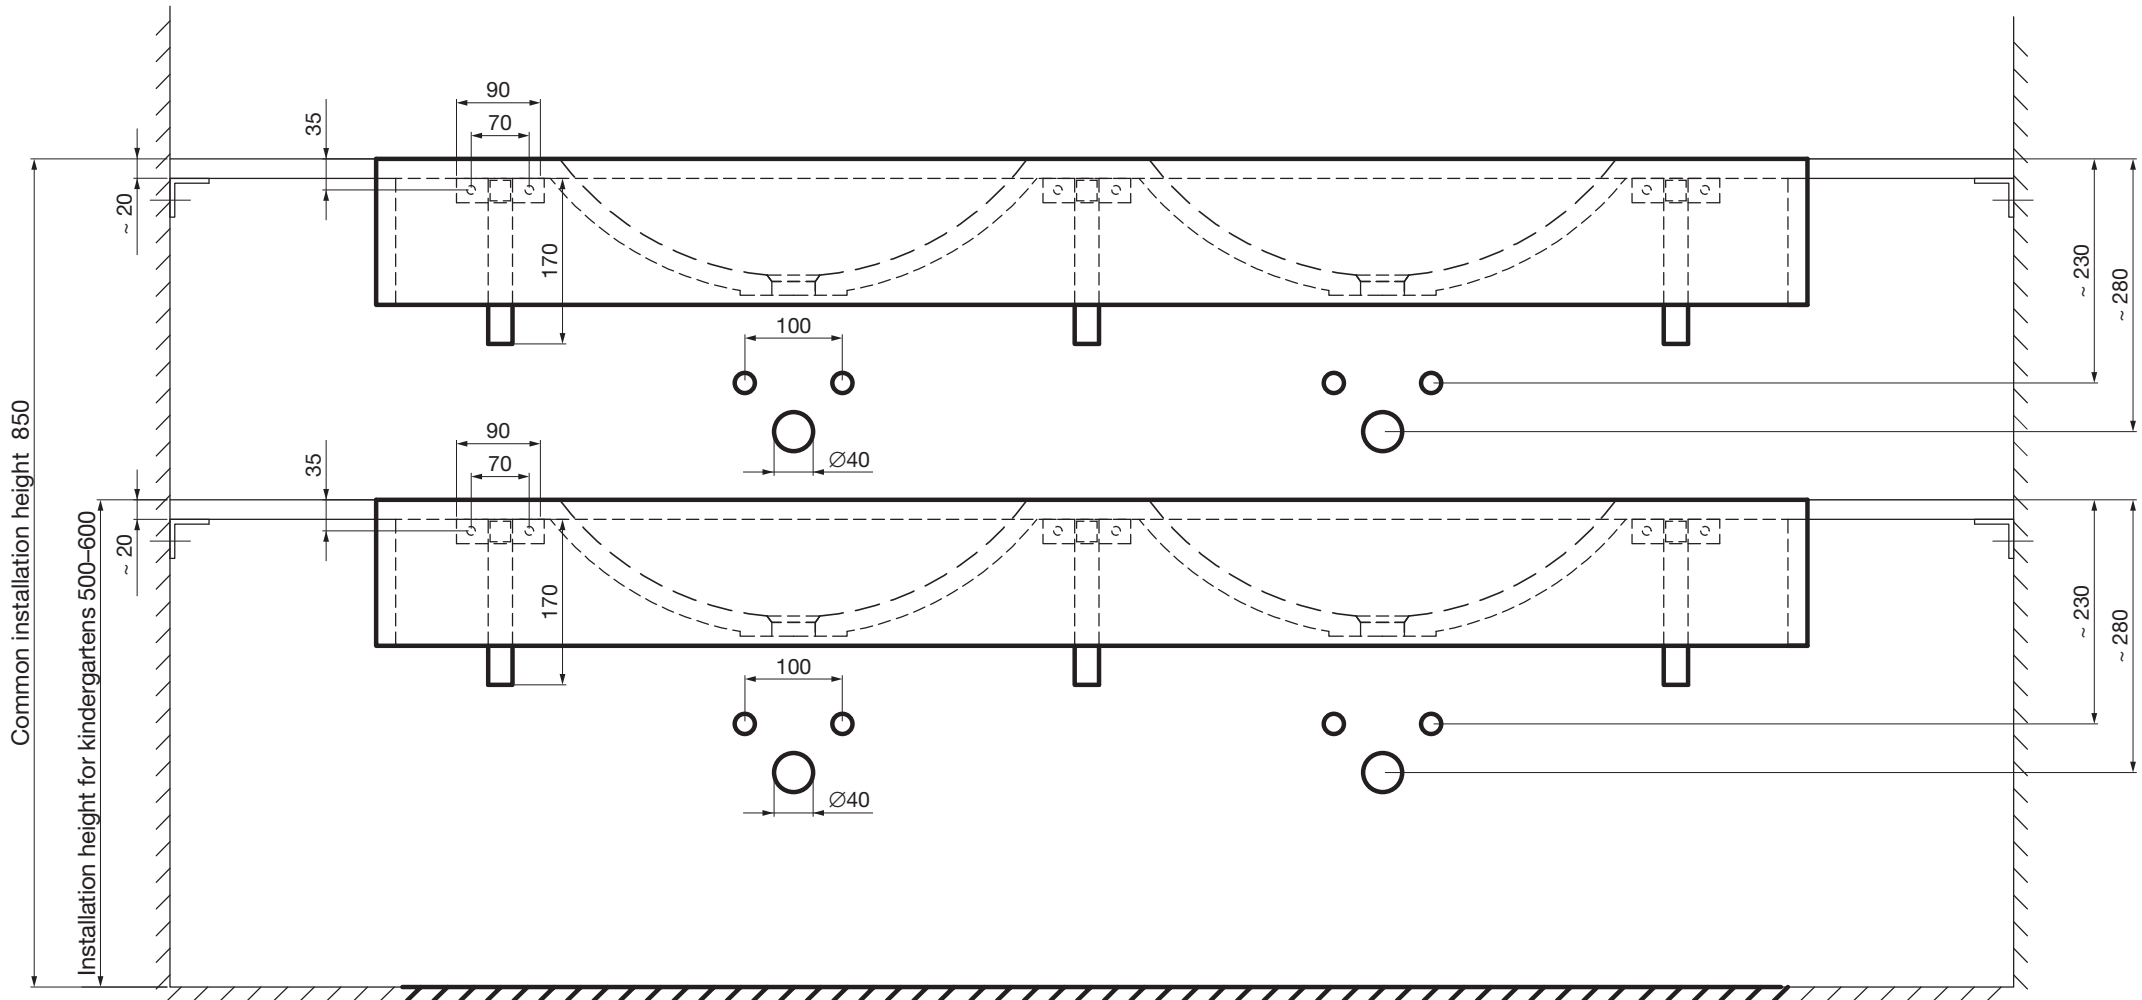

Comment: - our offer of the fixing components is in the Accessories section
- all dimensions are in mm